



EURO ACCESS

MZ 13-42

PERSONNEL PLATFORM

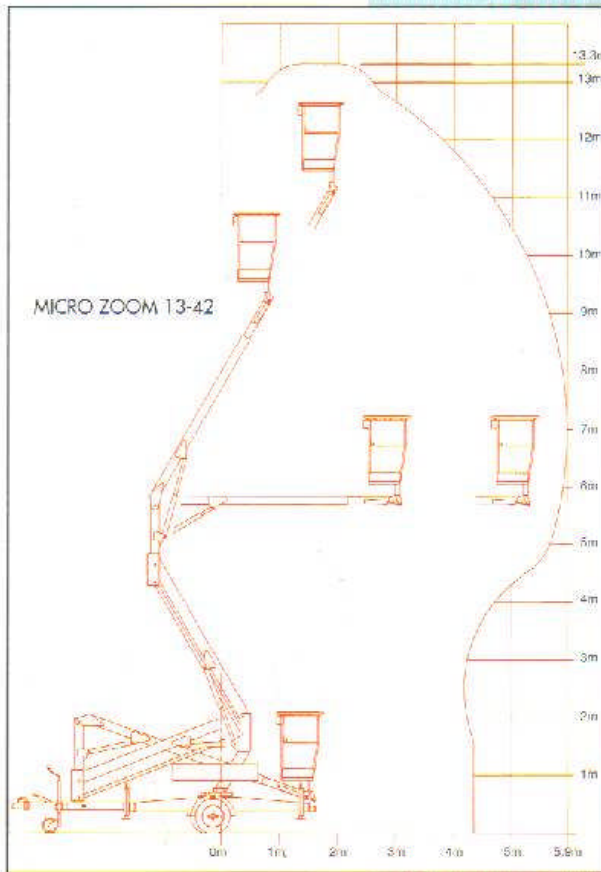

Working Envelope for MZ 13-42

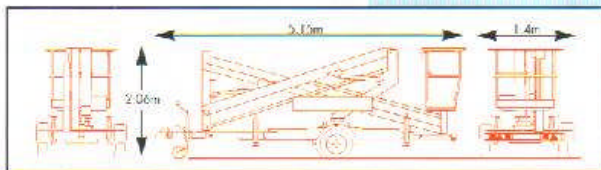

SPECIFICATIONS

MZ 13-42

OPERATING DIMENSIONS

Max. Working Height:	13m
Max. Platform height:	11.20m
Max. Outreach:	5.8m
Stabilizer Base:	3.0 x 3.0m
Safe working load:	215kgs
Rotation:	360°

CLOSED DIMENSIONS

Height:	2.06m
Width:	1.75m
Length:	5.15m
Ground Clearance:	0.16m
Weight:	1350kg

PLATFORM DIMENSIONS

Length:	1.10m
Width:	0.58m
Guard Rail Height:	1.15m
Toe Board Height:	0.15m

CONTROL SYSTEM

Controls:	Proportional Hydraulic
Standard Power Supply:	220-240v
Charger:	240v, 220v, 110v
Battery:	2 x 210 amp hour

SAFETY

Fail Safe hydraulics 100% overload tested. Designed to meet or exceed all British & European Safety Standards.

ALL ABOVE DIMENSIONS ARE APPROXIMATE. THE MANUFACTURERS RESERVE THE RIGHT TO ALTER OR IMPROVE SPECIFICATIONS WITHOUT NOTICE.



Hydraulic Jack Option

- Robust Construction
- Simple, Safe Operation
- Ease of Maintenance
- Low Cost Transport